

P.V.C.




02 9452-3566

sales@getpacked.com.au

HEAT SHRINKABLE FILM

"ECOFILM" The Phthalate-free films of PVC, BET, BOPP, POF, OPS & PLA comply with RoHS & REACH

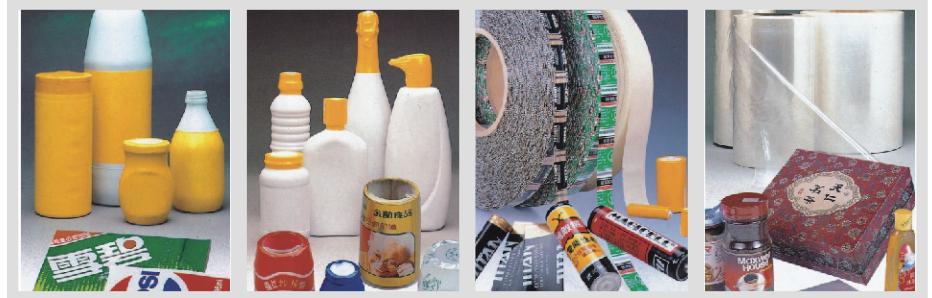

ISO
9001
22000
CERTIFIED



The Properties of PVC Shrink Label & Tamper Band

PROPERTIES	Unit	Typical Value		Test Method	
		Seamless	Seamed		
Thickness	μ m	50	40		
Density		1.35	1.35		
Reel Length	M	500	500		
Haze	%	4.7	4.7	D-1003	
45° Gloss	%	121	121	D-2457	
Impact Strength	J	1.2	1.2	IMPACT TESTING	
Tensile Strength	Mpa	MD	48	40	D-882
		TD	114	105	
Elongation at Break	%	MD	440	455	D-882
		TD	70	80	
Coefficient of Friction	Outer surface	0.39	0.31	D-1894	
Shrinkage	°C		100°C 10 Sec, Hot water		D-2732
	%	MD	10±2	3±2	
		TD	50±5	50±5	
Storage Temp.	°C	≤25°C		°C	
Shelf Life	Year	≤2 Without Opening		≤2	

1. The tested datum was based on the film thickness was listing.

201903

2. To provide the most suitable shrink label is based on the packaging product, shape & shrinking requirement.

All specifications, design and characteristics shown on this catalogue are subject to change without prior notice.



02 9452-3566

sales@getpacked.com.au